

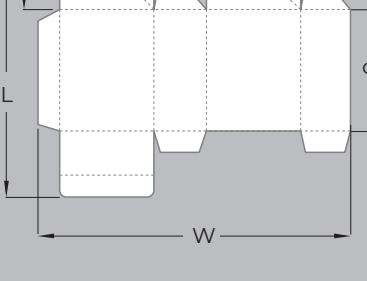


Straight line	Model Aristo	145	165	185	200	210	240	
	(mm)							
	min-max (W)	180-1450	180-1650	200-1850	200-2000	240-2100	240-2400	
	min-max (L)	120-1600	120-1600	120-1600	150-1600	150-1600	150-1600	
	min (a)	130	130	130	145	145	145	
	(in)							
	min-max (W)	7,09-57,09	7,09-64,96	7,87-72,83	7,87-78,74	9,45-82,68	9,45-94,49	
	min-max (L)	4,72-62,99	4,72-62,99	4,72-62,99	5,91-62,99	5,91-62,99	5,91-62,99	
min (a)	5,12	5,12	5,12	5,71	5,71	5,71		


Dimensions depend on the equipment and the appropriate configuration of the machine

Double wall	Model Aristo	145	165	185	200	210	240	
	(mm)							
	min-max (W)	150-1200	150-1450	150-1600	150-1600	150-1600	150-1600	
	min-max (L)	120-1400	120-1400	120-1600	120-1600	120-1600	120 x 1600	
	min (e)	25	25	25	25	25	25	
	(in)							
	min-max (W)	5,91-47,24	5,91-57,09	5,91-62,99	5,91-62,99	5,91-62,99	5,91-62,99	
	min-max (L)	4,72-55,12	4,72-55,12	4,72-62,99	4,72-62,99	4,72-62,99	4,72-62,99	
min (e)	0,98	0,98	0,98	0,98	0,98	0,98		


Dimensions depend on the equipment and the appropriate configuration of the machine

Look bottom (k3 version required)	Model Aristo	145	165	185	200	210	240	
	(mm)							
	min-max (W)	280-1450	280-1650	280-1850	280-2000	280-2100	280-2400	
	min-max (L)	100-1500	100-1500	100-1650	100-1800	100-1800	100-1800	
	min (C)	70	70	70	100	100	100	
	min (A)	40	40	40	40	40	40	
	(in)							
	min-max (W)	11,02-57,09	11,02-64,96	11,02-72,83	11,02-78,74	11,02-82,68	11,02-94,49	
min-max (L)	3,94-59,06	3,94-59,06	3,94-64,96	3,94-70,87	3,94-70,87	3,94-70,87		
min (C)	2,76	2,76	2,76	3,94	3,94	3,94		
min (A)	1,57	1,57	1,57	1,57	1,57	1,57		


Dimensions depend on the equipment and the appropriate configuration of the machine

Four corner (k4 version required)	Model Aristo	145	165	185	200	210	240	
	(mm)							
	min-max (W)	270-1450	270-1650	270-1850	270-2000	270-2100	270-2400	
	min-max (L)	130-1600	130-1600	130-1600	130-1600	130-1600	130-1600	
	min (d)	40	40	40	40	40	40	
	min (C)	150	150	150	150	150	150	
	(in)							
	min-max (W)	10,63-57,09	10,63-64,96	10,63-72,83	10,63-78,74	10,63-82,68	10,63-94,49	
min-max (L)	5,12-62,99	5,12-62,99	5,12-62,99	5,12-62,99	5,12-62,99	5,12-62,99		
min (d)	1,57	1,57	1,57	1,57	1,57	1,57		
min (C)	5,91	5,91	5,91	5,91	5,91	5,91		

Dimensions depend on the equipment and the appropriate configuration of the machine

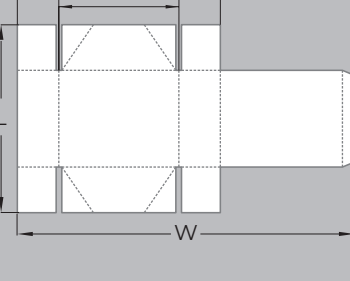Four corner with lid (k4 version required)	Model Aristo	145	165	185	200	210	240	
	(mm)							
	min-max (W)	270-1450	270-1650	270-1850	270-2000	270-2100	270-2400	
	min-max (L)	130-1600	130-1600	130-1600	130-1600	130-1600	130-1600	
	min (d)	40	40	40	40	40	40	
	min (c)	150	150	150	150	150	150	
	(in)							
	min-max (W)	10,63-57,09	10,63-64,96	10,63-72,83	10,63-78,74	10,63-82,68	10,63-94,49	
min-max (L)	5,118-62,99	5,118-62,99	5,118-62,99	5,118-62,99	5,118-62,99	5,118-62,99		
min (d)	1,575	1,575	1,575	1,575	1,575	1,575		
min (c)	5,906	5,906	5,906	5,906	5,906	5,906		

Dimensions depend on the equipment and the appropriate configuration of the machine

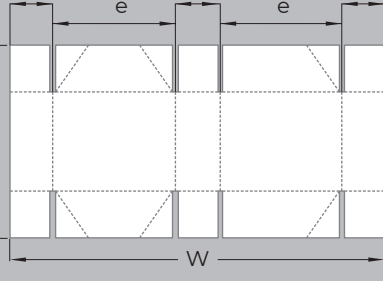Six corner (k6 version required)	Model Aristo	145	165	185	200	210	240	
	(mm)							
	min-max (W)	440-1450	440-1650	440-1850	440-2000	440-2100	440-2400	
	min-max (L)	180-1600	180-1600	180-1600	180-1600	180-1600	180-1600	
	min (e)	150	150	150	150	150	150	
	min (l)	40	40	40	40	40	40	
	(in)							
	min-max (W)	17,32-57,09	17,32-64,96	17,32-72,83	17,32-78,74	17,32-82,68	17,32-94,49	
min-max (L)	7,087-62,99	7,087-62,99	7,087-62,99	7,087-62,99	7,087-62,99	7,087-62,99		
min (e)	5,906	5,906	5,906	5,906	5,906	5,906		
min (d)	1,575	1,575	1,575	1,575	1,575	1,575		

Dimensions depend on the equipment and the appropriate configuration of the machine

Model Aristo	145	165	185	200	210	240
Processed materials						
Carton board max	2000g/m ³	2000g/m ³	2000g/m ³	2000g/m ³	2000 g/m ³	2000 g/m ³
Corrugated flute type	A, B, C, E, F, N, BE, BF, EF	A, B, C, E, F, N, BE, BF, EF	A, B, C, E, F, N, BE, BF, EF	A, B, C, E, F, N, BE, BF, EF	A, B, C, E, F, N, BE, BF, EF	A, B, C, E, F, N, BE, BF, EF
Max product height	do 38 mm	do 38 mm	do 38 mm	do 38 mm	do 38 mm	do 38 mm
Technical Data						
Voltage	400 V	400 V	400 V	400 V	400 V	400 V
Motor Power kW *	16-36	16-36	16-40	16-40	16-40	16-40
Length *	16-26m	16-26m	16-26m	16-26m	16-26m	16-26m
Net weight t *	od 8 do 11	od 10-15	od 10-15	od 10 do 18	od 10 do 20	od 10 do 20
Speed	250 m/min	250 m/min	250m/min	250 m/min	250 m/min	250 m/min
Inching speed	do 300m/min	do 300 m/min	do 300 m/min	do 300 m/min	do 300 m/min	do 300 m/min

* Parameters depend on the machine configuration

Model Aristo	145	165	185	200	210	240
Processed materials						
Carton board max	2000 g/m ³	2000 g/m ³	2000 g/m ³	2000 g/m ³	2000 g/m ³	2000 g/m ³
Corrugated flute type	A, B, C, E, F, N, BE, BF, EF	A, B, C, E, F, N, BE, BF, EF	A, B, C, E, F, N, BE, BF, EF	A, B, C, E, F, N, BE, BF, EF	A, B, C, E, F, N, BE, BF, EF	A, B, C, E, F, N, BE, BF, EF
Max product height	to 1.496 in	to 1.496 in	to 1.496 in	to 1.496 in	to 1.496 in	to 1.496 in
Technical Data						
Voltage	400 V	400 V	400 V	400 V	400 V	400 V
Motor Power kW *	16-36	16-36	16-40	16-40	16-40	16-40
Length *	52,6-85,4 ft	52,6-85,4 ft	52,6-85,4 ft	52,6-85,4 ft	52,6-85,4 ft	52,6-85,4 ft
Net weight t *	8 to 11	10 to 15	10 to 15	10 to 18	10 to 20	10 to 20
Speed	820,3 ft/min	820,3 ft/min	820,3 ft/min	820,3 ft/min	820,3 ft/min	820,3 ft/min
Inching speed	to 984,3 ft/min	to 984,3 ft/min	to 984,3 ft/min	to 984,3 ft/min	to 984,3 ft/min	to 984,3 ft/min

* Parameters depend on the machine configuration