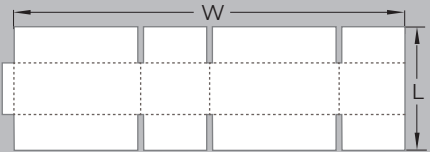
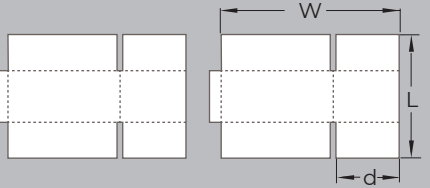


One-use packaging	Model Cassio	200	250	300	500
	(mm)				
	min-max (W)	700-1800	700-2300	700-3000	700-3000
	min-max (L)	500-1000	500-1000	500-1000	500-1000
	(in)				
	min-max (W)	27,56-70,87	27,56-90,55	27,56-90,55	27,56-90,55
	min-max (L)	19,69-39,37	19,69-39,37	19,69-39,37	19,69-39,37

Dimensions depend on the equipment and the appropriate configuration of the machine

Two-use packaging	Model Cassio	200	250	300	500
	(mm)				
	min-max (W)	700-1000	700-1200	700-1450	700-2400
	min-max (L)	60-600	60-600	60-600	
	min (d)	100	100	100	100
	(in)				
	min-max (W)	27,56-39,37	27,56-47,24	27,56-57,09	27,56-94,49
	min-max (L)	2,36-23,62	2,36-23,62	2,36-23,62	
	min (d)	3,94	3,94	3,94	3,94

Dimensions depend on the equipment and the appropriate configuration of the machine

Model Cassio	200	250	300	500
Processed materials				
Corrugated flute type	A,B,C,E,F,N,BE,BF, EF	A,B,C,E,F,N,BE,BF, EF	A,B,C,E,F,N,BE,BF, EF	A,B,C,E,F,N,BE,BF, EF
Technical Data				
Voltage	400 V	400 V	400 V	400 V
Motor Power kW *	od 7-9	od 7-9	od 7 do 9	od 7 do 9
Length *	5-10,5	5-10,5	5-10,5	5-10,5
Net weight t *	od 4 do 7	od 4-7	od 4-7	od 4 do 7
Speed	60 m/min	60 m / min	60 m / min	60 m / min

* Parameters depend on the machine configuration

Model Cassio	200	250	300	500
Processed materials				
Corrugated flute type	A,B,C,E,F,N,BE,BF, EF	A,B,C,E,F,N,BE,BF, EF	A,B,C,E,F,N,BE,BF, EF	A,B,C,E,F,N,BE,BF, EF
Technical Data				
Voltage	400 V	400 V	400 V	400 V
Motor Power kW *	od 7-9	od 7-9	od 7 do 9	od 7 do 9
Length *	16.40 ft-34.45 ft	16.40 ft-34.45 ft	16.40 ft-34.45 ft	16.40 ft-34.45 ft
Net weight t *	od 4 do 7	od 4-7	od 4-7	od 4 do 7
Speed	196.85 ft/min	196.85 ft/min	196.85 ft/min	196.85 ft/min

* Parameters depend on the machine configuration