

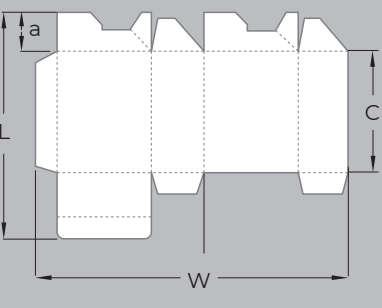


Straight line	Model Verso	50	60	80
	(mm)			
	min-max (W)	45*-500	45*-600	45*-800
	min-max (L)	70-550	70-600	70-600
	min (a)	35*	35*	35*
	(in)			
	min-max (W)	1.77*-19.69	1.77*-23.62	1.77*-31.50
	min-max (L)	2.76-21.65	2.76-23.62	2.76-23.62
	min (a)	1.38*	1.38*	1.38*

Dimensions depend on the equipment and the appropriate configuration of the machine
*Option

Double wall	Model Verso	50	60	80
	(mm)			
	min-max (W)	70-500	70-600	70-800
	min-max (L)	60-600	60-600	60-600
	min (e min)	10	10	10
	(in)			
	min-max (W)	2.76-19.69	2.76-23.62	2.76-31.50
	min-max (L)	2.36-23.62	2.36-23.62	2.36-23.62
	min (e min)	0.39	0.39	0.39

Dimensions depend on the equipment and the appropriate configuration of the machine

Look bottom (k3 version required)	Model Verso	50	60	80
	(mm)			
	min-max (W)	150-500	150-600	150-800
	min-max (L)	90-600	90-600	90-600
	min (C)	70	70	70
	min (a)	20	20	20
	(in)			
	min-max (W)	5.91-19.69	5.91-23.62	5.91-800
	min-max (L)	3.54-23.62	3.54-23.62	3.54-23.62
min (C)	2.76	2.76	2.76	
min (a)	0.79	0.79	0.79	

Wymiary uzależnione od wyposażenia i odpowiedniej konfiguracji maszyny

Model Verso	50	60	80
Processed materials			
Carton board max	800 g/m ³	800 g/m ³	800 g/m ³
Corrugated flute type	N-F-E	N-F-E	N-F-E
Technical Data			
Voltage	400 V	400 V	400 V
Motor Power kW *	13-15	13-15	13-15
Length * (m)	8,5-10,5	8,5-10,5	8,5-10,5
Net weight * (t)	4-7	4-7	4-7
Speed	to 200 m/min	to 200 m/min	to 200 m/min
Inching speed	to 400 m/min	to 400 m/min	to 400 m/min

* Parameters depend on the machine configuration

Model Verso	50	60	80
Processed materials			
Carton board max	800 g/m ³	800 g/m ³	800 g/m ³
Corrugated flute type	N-F-E	N-F-E	N-F-E
Technical Data			
Voltage	400 V	400 V	400 V
Motor Power kW *	13-15	13-15	13-15
Length * (ft)	27.89-34.45	27.89-34.45	27.89-34.45
Net weight * (t)	13.12-22.97	13.12-22.97	13.12-22.97
Speed	to 656.17 ft/min	to 656.17 ft/min	to 656.17 ft/min
Inching speed	to 1312.34 ft/min	to 1312.34 ft/min	to 1312.34 ft/min

* Parameters depend on the machine configuration