
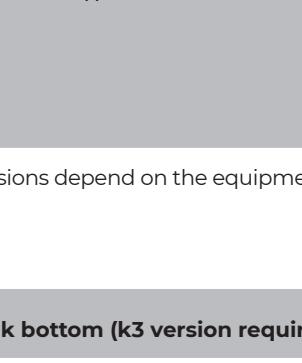
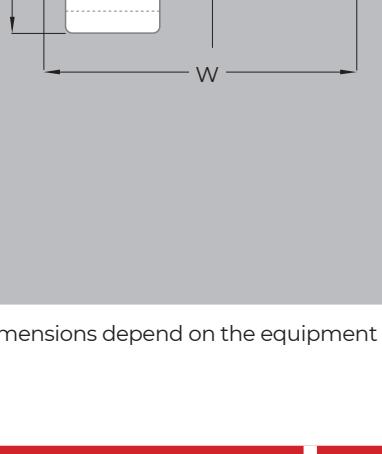


Straight line	Model Verso ECO	50	60	80
(mm)				
	min-max (W)	45*-500	45*-600	45*-800
	min-max (L)	70-550	70-600	70-600
	min (a)	35*	35*	35*
(in)				
	min-max (W)	1.77*-19.69	1.77*-23.62	1.77*-31.50
	min-max (L)	2.76-21.65	2.76-23.62	2.76-23.62
	min (a)	1.38*	1.38*	1.38*

Dimensions depend on the equipment and the appropriate configuration of the machine
 * Option

Double wall	Model Verso ECO	50	60	80
(mm)				
	min-max (W)	70-500	70-600	70-800
	min-max (L)	60-600	60-600	60-600
	min (e min)	10	10	10
(in)				
	min-max (W)	2.76-19.69	2.76-23.62	2.76-31.50
	min-max (L)	2.36-23.62	2.36-23.62	2.36-23.62
	min (e min)	0.39	0.39	0.39

Dimensions depend on the equipment and the appropriate configuration of the machine

Look bottom (k3 version required)	Model Verso ECO	50	60	80
(mm)				
	min-max (W)	150-500	150-600	150-800
	min-max (L)	90-600	90-600	90-600
	min (C)	70	70	70
	min (A)	20	20	20
(in)				
	min-max (W)	5.91-19.69	5.91-23.62	5.91-31.50
	min-max (L)	3.54-23.62	3.54-23.62	3.54-23.62
	min (C)	2.76	2.76	2.76
	min (A)	0.79	0.79	0.79

Dimensions depend on the equipment and the appropriate configuration of the machine

Model Verso ECO	50	60	80
Processed materials			
Carton board max	800 g/m ³	800 g/m ³	800 g/m ³
Corrugated flute type	N-F-E	N-F-E	N-F-E
Technical Data			
Voltage	400 V	400 V	400 V
Motor Power kW *	8-12	8-12	8-12
Length * [m]	8,5-10,5	8,5-10,5	8,5-10,5
Net weight * [t]	3-5	3-5	3-5
Speed	100 m/min	100 m/min	100 m/min

* Parameters depend on the machine configuration

Model Verso ECO	50	60	80
Processed materials			
Carton board max	800 g/m ³	800 g/m ³	800 g/m ³
Corrugated flute type	N-F-E	N-F-E	N-F-E
Technical Data			
Voltage	400 V	400 V	400 V
Motor Power kW *	8-12	8-12	8-12
Length * [ft]	27.89-34.45	27.89-34.45	27.89-34.45
Net weight * [t]	3-5	3-5	3-5
Speed	328.08 ft/min	328.08 ft/min	328.08 ft/min

* Parameters depend on the machine configuration